




# BEARING-THAILAND CO.,LTD.

## SKF FYT 15/16 TF bearing units

Bearing No. FYT 15/16 TF

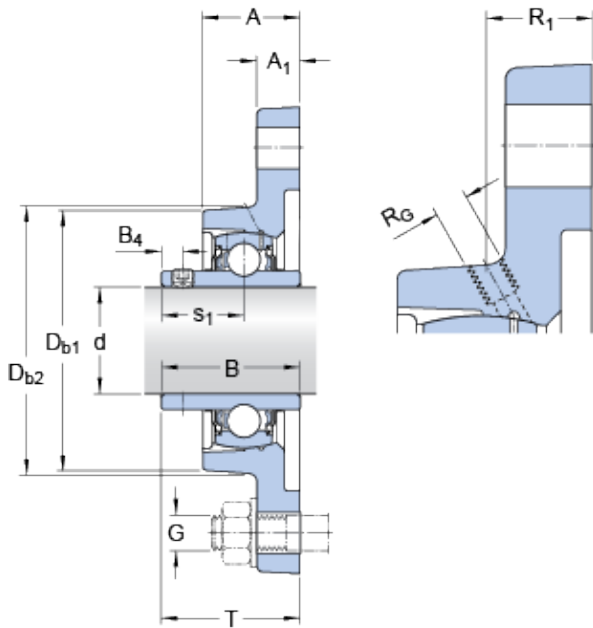

FYT 15/16 TF Bearing 2D drawings and 3D CAD models

Size	23.812x30x12 mm
Bore Diameter	23,812 mm
Outer Diameter	30 mm
Width	12 mm
d	23.812 mm
A	30 mm
A <sub>1</sub>	12 mm
B	34.1 mm
B <sub>4</sub>	5 mm
D <sub>b1</sub>	65 mm
D <sub>b2</sub>	70 mm
J	99 mm
H	124 mm
L	70 mm
H	12.5 mm
s <sub>1</sub>	19.8 mm
T	38.8 mm
J <sub>6</sub>	81 mm
J <sub>7</sub>	12 mm
N <sub>4</sub>	2 mm
D <sub>N</sub>	6.579 mm
SW <sub>N</sub>	7.938 mm
G <sub>N</sub> - 1/4-28 SAE-LT	1/428 SAELT
R <sub>G</sub> - 1/4-28 UNF	1/428 UNF
R <sub>1</sub>	19.5 mm



## BEARING-THAILAND CO.,LTD.

R	45 °
Basic dynamic load rating - C	14 kN
Basic static load rating - C <sub>0</sub>	7.8 kN
Fatigue load limit - P <sub>u</sub>	0.335 kN
Limiting speed	7000 r/min
Mass bearing unit	0.61 kg
Thread - G <sub>2</sub> - 1/4-28 UNF	1/428 UNF
Hexagonal key size for grub screw - H	3.175 mm
Category	Flange Block Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.59
EAN	7316577755223
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Set Screw
Housing Style	2 Bolt Flange Block
Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Mounting Bolts	7/16 Inch
Relubricatable	Yes
Insert Part Number	YAR 205-015-2F
Seals	M Seal
Housing Configuration	1 Piece Solid
Pilot Configuration	No Pilot
Inch - Metric	Inch
Long Description	2 Bolt Flange Block; 15/16" Bore; 3.9" Bolt Circle; 3-29/32" Bolt Spacing; 1



## BEARING-THAILAND CO.,LTD.

	Piece Solid; Set Screw Mount; Cast Iron; Ball Bearing; 1-11/32" Length Thru Bore; Relubricatable; M Sea
Other Features	Single Row   Standard Duty   Wide Inner Race   Open End   Has Flinger   Y Bearing
Category	Flange Block
UNSPSC	31171501
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Flanged
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	FYT 15/16 TF
Weight / LBS	1.3
Cartridge Pilot Diameter	0 Inch   0 Millimeter
Cartridge Pilot Depth	0 Inch   0 Millimeter
Bolt Spacing	3.906 Inch   99.2 Millimeter
Bore	0.938 Inch   23.825 Millimeter
Length Thru Bore	1.344 Inch   34.13 Millimeter
Nominal Bolt Circle Diameter Round	3.9 Inch   99 Millimeter